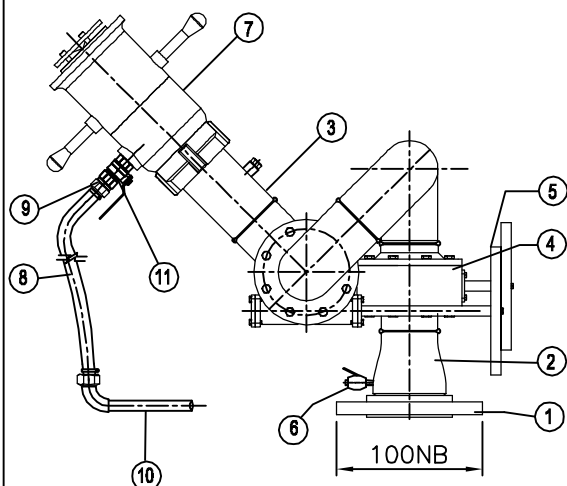
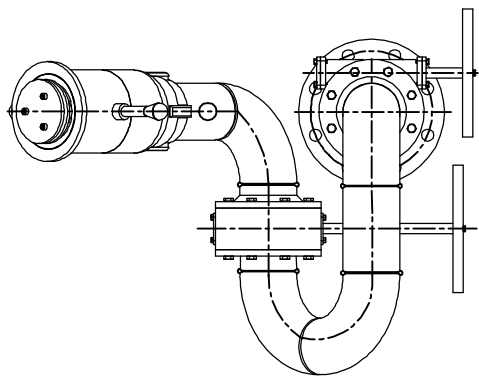


**UL LISTED****MATERIAL OF CONSTRUCTION**

SR.NO.	DESCRIPTION	MATERIAL
1	BASE FLANGE	STAINLESS STEEL(SS-316)
2	REDUCER	STAINLESS STEEL(SS-316)
3	PIPE	STAINLESS STEEL(SS-316)
4	SWIVEL JOINT	STAINLESS STEEL(SS-316)
5	HAND WHEEL	STAINLESS STEEL(SS-316)
6	DRAIN VALVE	STAINLESS STEEL(SS-316)
7	AQUA FOAM NOZZLE	STAINLESS STEEL(SS-316)
8	PICK UP TUBE	PVC HELICAL
9	PICK UP ADAPTOR	STAINLESS STEEL(SS-316)
10	DIP TUBE	STAINLESS STEEL(SS-316)
11	BALL VALVE	STAINLESS STEEL(SS-316)

**TECHNICAL DETAILS**

1.MAX.WORKING PRESSURE:-12.5 BAR
2.HYDRAULIC TEST PRESSURE:-23 BAR FOR 5 MIN.
3.FOAM INDUCTION :- 3% WITH AFF
4.FOG CONE :-160°
5.FLANGE DRILLING:-AS PER ANSI B 16.5,150#
6.ROTATION:-HORIZONTAL-340°,VERTICAL-+90°,-45°
7.FINISH:-PAINTED FIRE-RED TO SHADE NO:536 OF IS:5

**PERFORMANCE DETAILS**

MODEL	FLANGE NB	NOZZLE NB	FLOW IN GPM @ 7 BAR	HORIZONTAL RANGE IN MTR
				WATER
WFM-750-S6	100	80	750	60

NOTE:-1) THROW MENTIONED IN STILL AIR CONDITION.

**DECODING**

WFM-WATER CUM FOAM MONITOR  
750-750 USGPM  
S6-SS:316